


Installation Guidelines

for Wood Burning & Multi Fuel Appliances




Connecting Flue Pipe


The stove should be connected to the flue using vitreous enamel or 1mm thick single wall stainless steel pipe.

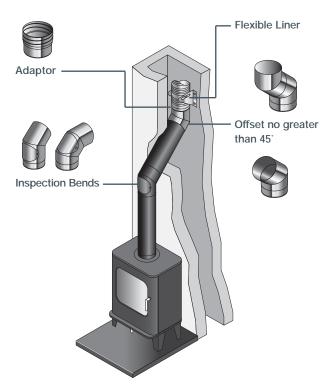

Existing Masonry Chimney Top outlet on stove

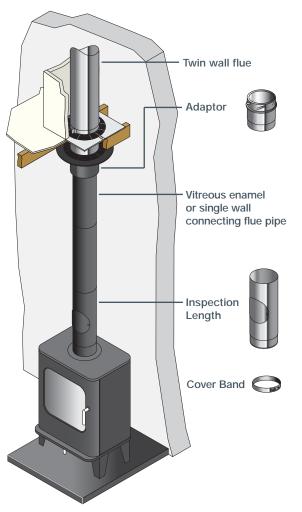


New System Chimney







Existing Chimneys

Relining an existing chimney with twin wall flexible liner

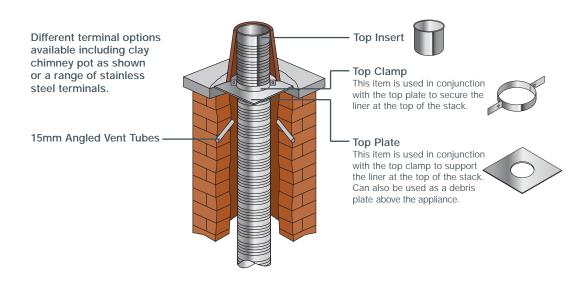


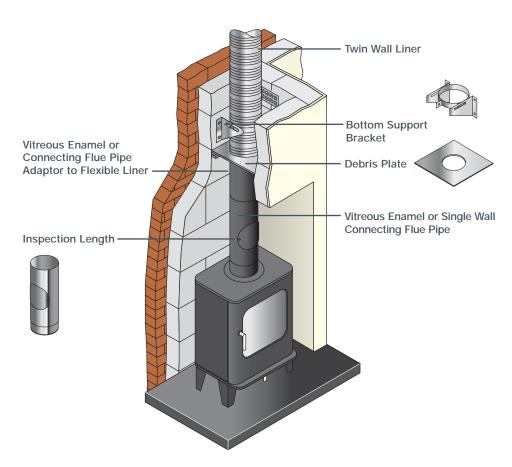



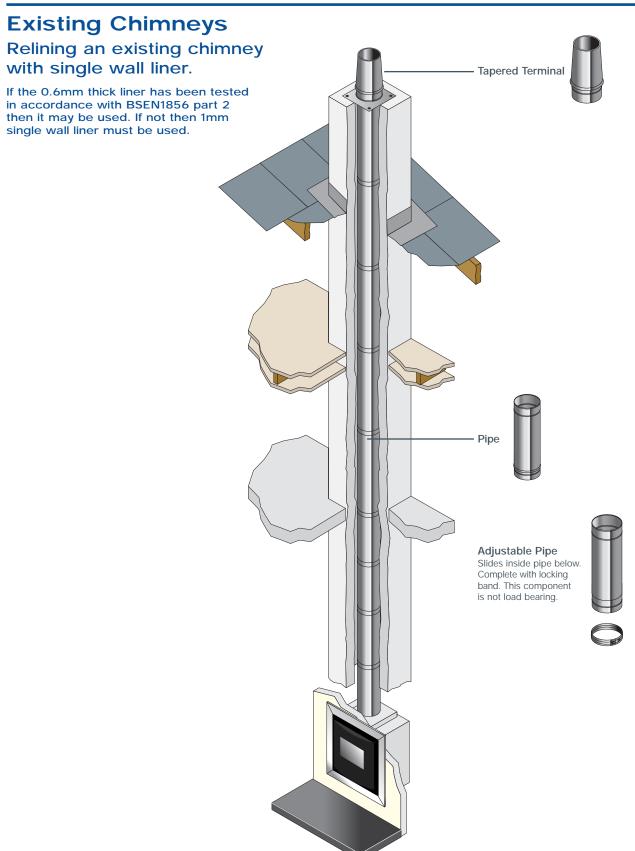




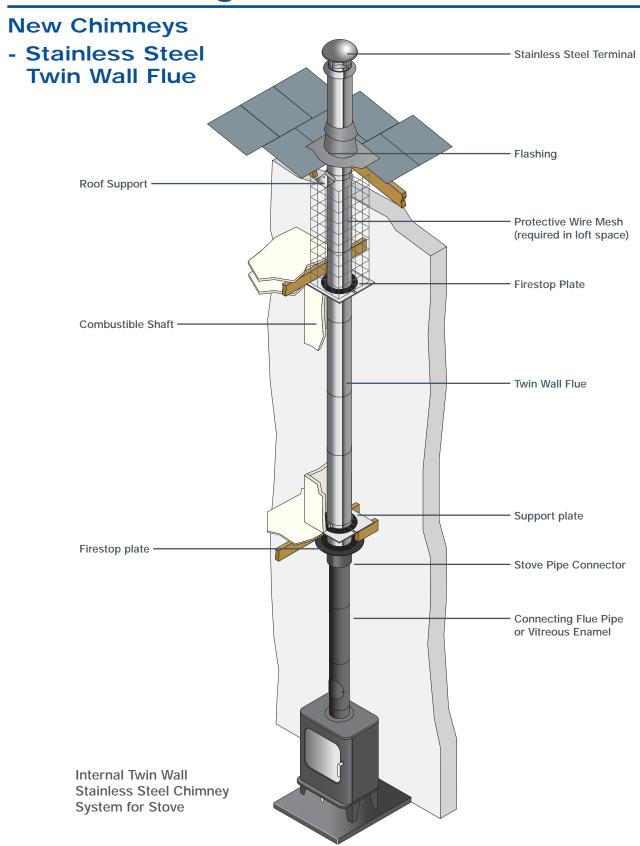





Clay Concrete & Pumice - Chimney Systems

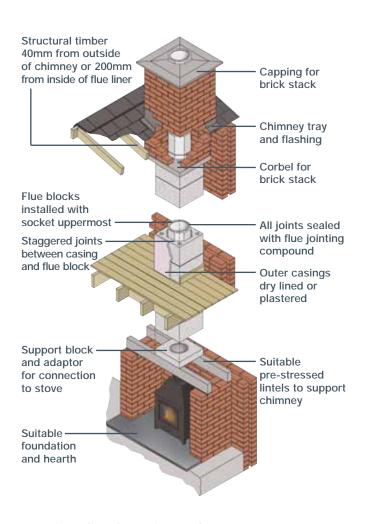

Free Standing Stove in an Alcove

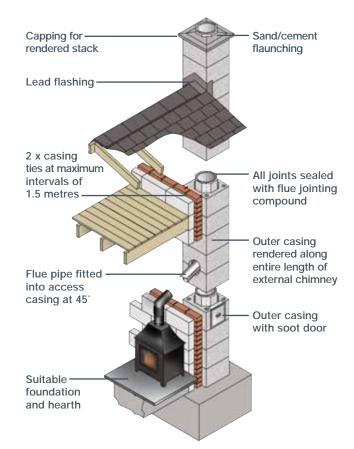


Free standing stove with external chimney with preformed stove entry kit







Clay Concrete & Pumice

- Chimney Systems






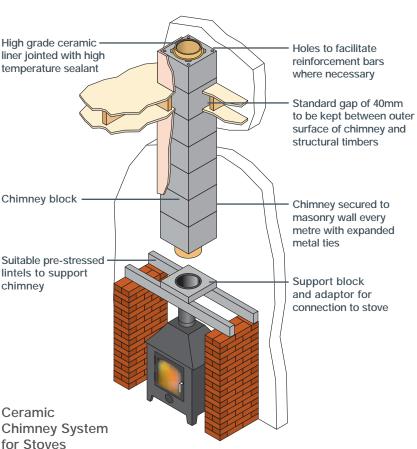




Clay Concrete & Pumice

- Liners

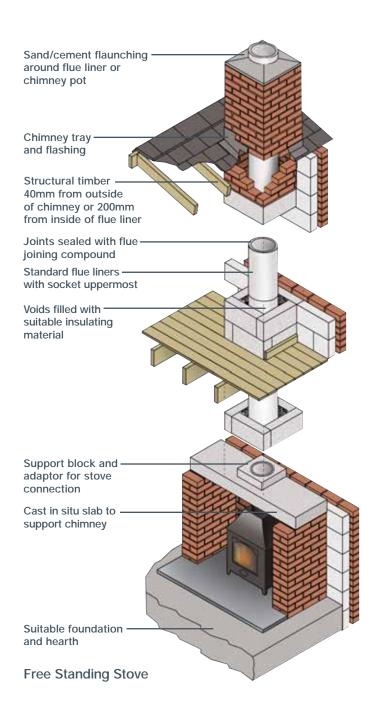

Continue to build chimney as in free standing stove







Open Fires

Clay Concrete & Pumice

- Chimney Systems

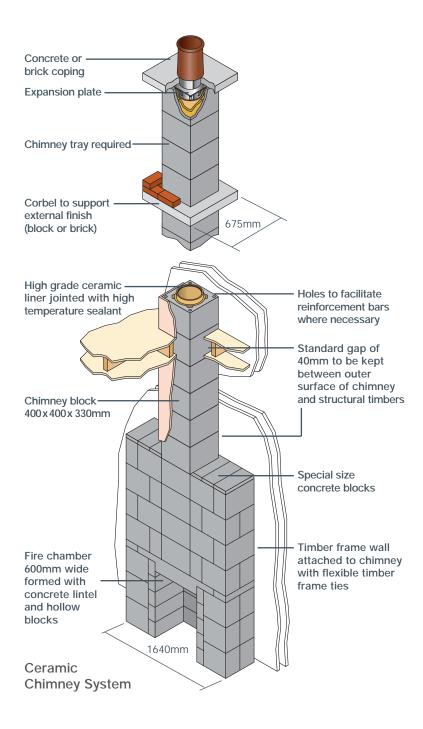

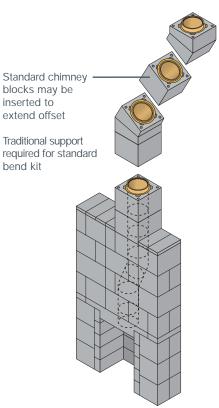

Chimney Breast Bend Kit


Two Bend Kits are available. The Breast Bend Kit allows the flue to be removed from 200 - 400mm within the chimney breast. The Standard Bend Kit allows the flue to be moved horizontally as desired so long as it is supported in the traditional manner.




Open Fires

Clay Concrete & Pumice

- Chimney Systems

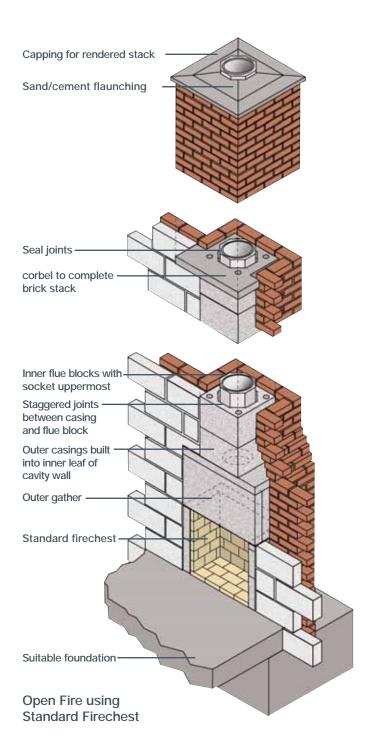







Open Fires

Clay Concrete & Pumice

- Liners

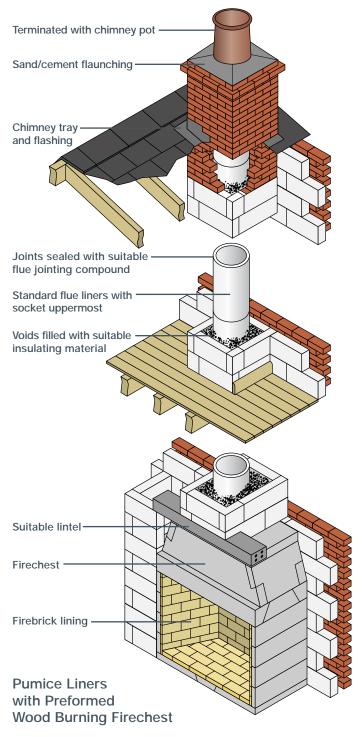

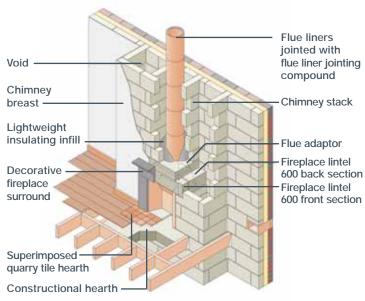


Standard Methodology for Clay, Concrete & Pumice Liners



Wood Burning & Multi Fuel Appliances

Chimney Fan System

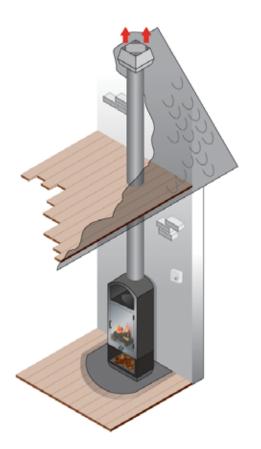










Examples of Terminals


Examples of Stainless Steel Terminals, Birdguards & Anti-Downdraught Terminals




Birdguard fitted to Chimney Pot




Raincap fitted to Chimney Pot




Solid Fuel Anti-Downdraught fitted to Chimney Pot (with or without mesh)




Pot Hanger fitted to Twin Wall Flexible Liner




Birdguard Pot Hanger fitted to Twin Wall Flexible Liner (with or without mesh)



Anti-Downdraught Pot Hanger fitted to Twin Wall Flexible Liner (with or without mesh)



Birdguard fitted to Twin Wall System (with or without mesh)



Anti-Downdraught fitted to Twin Wall System (with or without mesh)



List of Members

Brewer Metalcraft

Ford Lane Industrial Estate, Ford, Arundel, West Sussex,

T: 0745 676 0702 F: 0845 676 0703

Deks UK

Blackfriars Road, Nailsea, Bristol,

T: 01275 858 866 F: 01275 855 887 E: sales@deks.co.uk

Exodraft

Cressex Business Park, High Wycombe,

HP12 3TD, T: 01494 465166 F: 01494 465163

H. Docherty

15/16 Colthrop Business Park,

Thatcham, Berkshire,

T: 01635 292 400 F: 01635 201 737 E: sales@docherty.co.uk

Hanson Red Bank

Measham, Swadlincote,

T: 01530 270333 F: 01530 273667

JRF Chimney Specialists & Heating Distributors

KY6 2SD, T: 01592 771199

E: info@jrf-chimney-spec.co.uk www.jrf-chimney-spec.co.uk

Mi-Flues

T: 01253 884 972 F: 01253 893 752

www.mi-flues.com

MMF

55 Woodburn Road, Smethwick,

www.fluepipes.com

Muelink & Grol B.V.

Postbus 509, 9700 AM Groningen - Holland,

www.muelink-grol.com

Pennine Systems

Crossley Works, Stockfield Mount, Off Peel Street, Chadderton,

OL9 9LR, T: 0161 678 2998 F: 0161 678 2997

Poujoulat (UK)

Unit 1, Quadrum Park, Old Portsmouth Road,

E: sales@poujoulat.co.uk www.poujoulat.co.uk

W.T. Knowles & Sons

West Yorkshire, HX5 9JA, T: 01422 372 833

E: sales@wtknowles.co.uk www.wtknowles.co.uk

Schiedel Chimney Systems Crowther Estate, Washington,

Tyne & Wear, NE38 0AQ

F:0191 415 1263 Schiedel Isokern T: 01202 861650

E: info@schiedel.co.uk W: www.schiedel.co.uk

SFL Flues & Chimneys

Pottington Business Park,

E: info@sflchimneys.com www.sflchimneys.com

Simplefit

Central Crescent, Marchwood Industrial Park,

Southampton, SO40 4BJ,

F: 023 8066 3086 E: sales@simplefit.co.uk www.simplefit.co.uk

Specflue

8 Curzon Road,

Sudbury, Suffolk,

T: 01787 880333 F: 01787 880555 E: sales@specflue.com www.specflue.com

Wavin

Crow Edge, Sheffield,

T: 0844 856 5152 F: 0870 443 8000